


Film Data Sheet  
T-689  
Color Pack Film

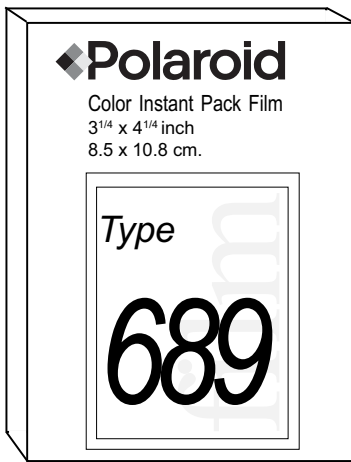

**Film Speed**

ISO 100/DIN 21

**Format**

3<sup>1</sup>/<sub>4</sub> x 4<sup>1</sup>/<sub>4</sub> in. (8.5 x 10.8 cm)  
Pack Film

**Image Area**

2<sup>7</sup>/<sub>8</sub> x 3<sup>3</sup>/<sub>4</sub> in. (7.3 x 9.5 cm)

**Finish**

Glossy

**Exposures per Unit**

10 exposures per pack

**Development Time**

90 seconds at 70°F

**Description**

Medium-speed, medium-contrast, medium-grain, daylight and electronic flash balanced (5500° K) color print film.

**Key Applications**

- Professional proofing/final art
- Passport/document photography
- Real estate, insurance, construction and architectural design

**Compatible Hardware**

- Cameras or instruments with CB-103 Back or OEM CB-100 Back (these holders are supplied by medium format camera manufacturers such as Mamiya, Hasselblad and Konica)
- Polaroid Model 405 Film Holder

**Special Treatment**

This film is not recommended for use with laminates requiring a wet print to produce a photo-destruct bond. Use Polaroid T-669 or Polacolor ID UV film.

**Reciprocity Performance**

Contact Polaroid Technical Assistance at 1.800.225.1618.

**Alternative Product**

- Polacolor ER (T-669) (ISO 80)
- Polacolor ER (T-108) (ISO 80)
- Polacolor Pro 100 (T-679) (ISO 100)
- Polacolor 100 ID UV (ISO 100)

**Processing Information**

Temperature °F	°C	Proc. Time (sec.)
75+	24+	90
70	21	90
65	18	120
55	13	120

**Caution**

This film uses a small amount of caustic paste. If any paste appears, avoid contact with skin, eyes and mouth and keep away from children and animals. **If you get some paste on your skin, wipe it off immediately, then wash with water to avoid an alkali burn.** If eye contact occurs, quickly wash the area with plenty of water and see a doctor. Keep discarded materials away from children, animals, clothing and furniture.

**Limited Warranty**

See information on the film box.